

Headwall is the
proud recipient of:



HyperCore™ Data Acquisition System




FEATURES

- Provides data fusion for connected instruments including hyperspectral, LiDAR, RGB, Thermal
- Small, light, and rugged for UAV deployment
- Storage capacity: 470GB
- Power: 9.6W idle, 13.2W max.

HyperCore™	
Voltage (VDC)	10.5 - 32
Power (watts)	Idle 9.6; maximum 13.2
Size (mm / inches)	90 x 76 x 70 / 3.5" x 3.0" x 2.8"
Weight (kg / lb)	0.6 / 1.3
Storage capacity	470GB
Connections	Gigabit Ethernet (2); Base CameraLink, RS232/485 serial
Operating Temp. Range	-10-50 degrees C

Synthesized Data

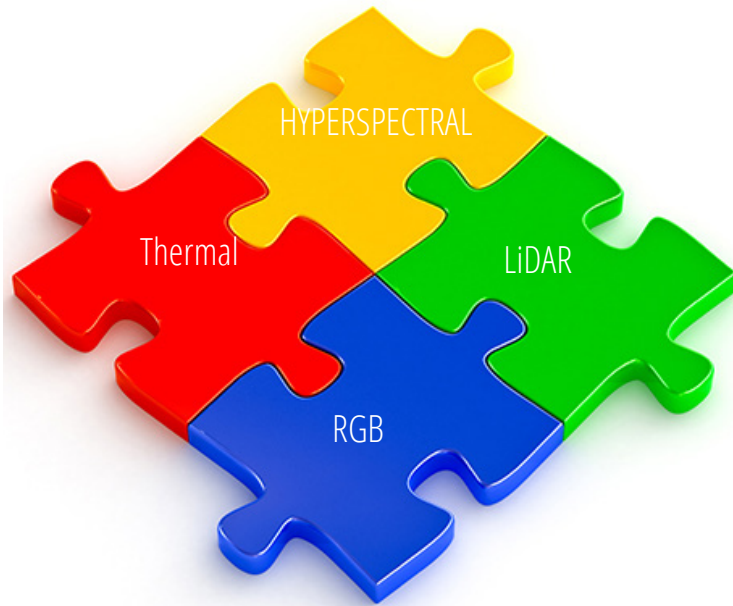

Headwall Photonics, Inc.
580 Main Street
Bolton, MA 01740

Tel: +1 (978) 353-4100
Fax: +1 (978) 348-1864
Skype: Headwall.Photonics

Headwall BVBA

Pegasus Park
De Kleetlaan 5 / 9
1831 Diegem, Belgium
information@headwall.be
www.headwall.be



APRIL 2022 REV 1